
- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 4000pcs

- Data lines and low power lines
- Connec on between digital and analog circuit



	(mm)	(Ω)		(max) (Ω)	Current (max) (mA)
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		

Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

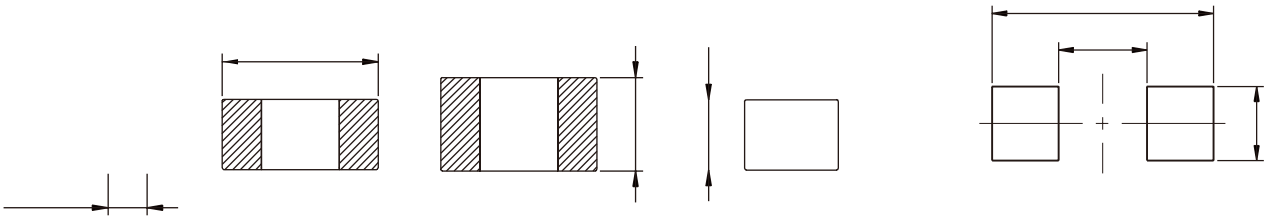