
# SMD EMI Suppression Ferrite Bead
# Size 1812



- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 1000pcs

- Data lines and low power lines
- Connec on between digital and analog circuit

## Dimensions: [mm]

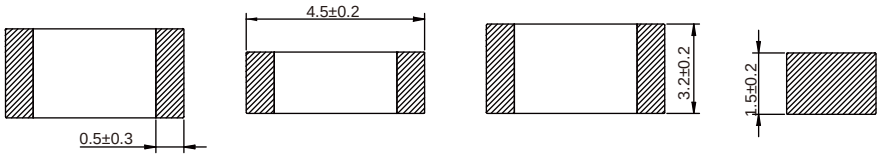


## Land Pattern: [mm]



## Electrical Properties:

| | (Ω) | | (max) (Ω) | Current (max) (mA) |
|---|---|---|---|---|
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |
| | | ±25% | | |

Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

# Impedance & Frequency Characteristics:

