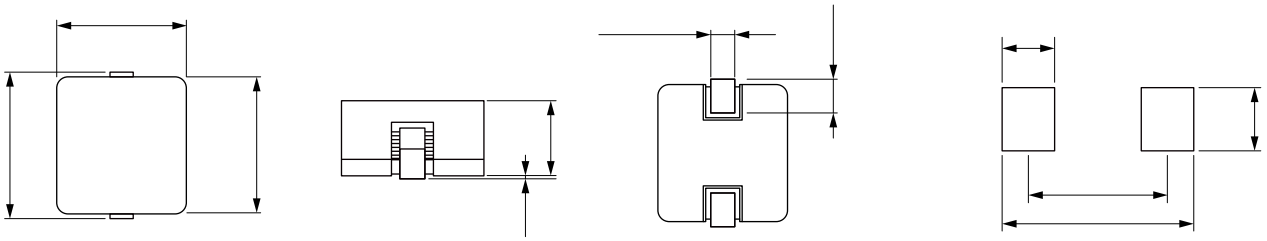
FHC Series

CHARACTERISTICS

- Low Rdc with flat wire design
- Low cooper losses at high frequency
- Magne c shielded structure
- Quan ty: 400pcs

APPLICATION

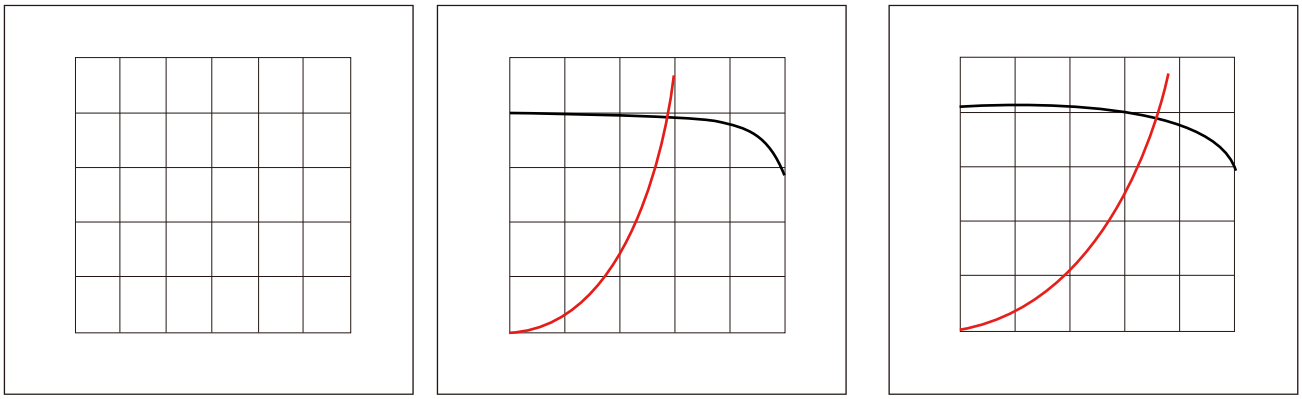
- High current DC/DC converter
- LC filter



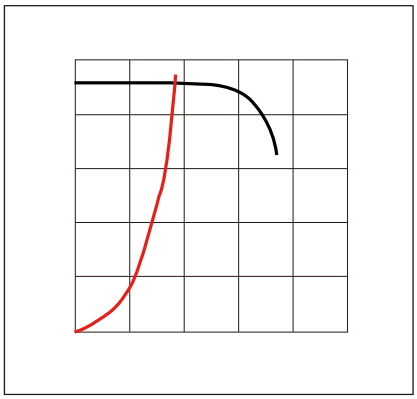
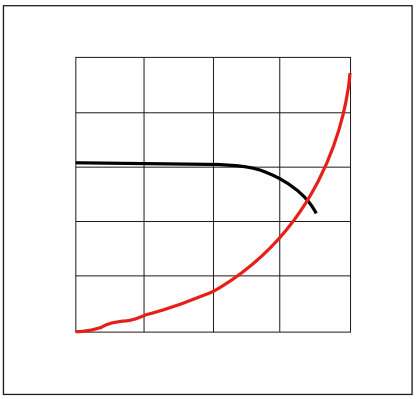
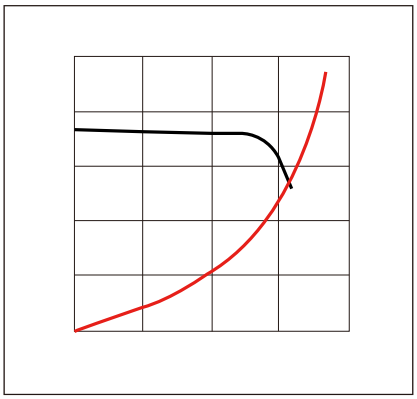
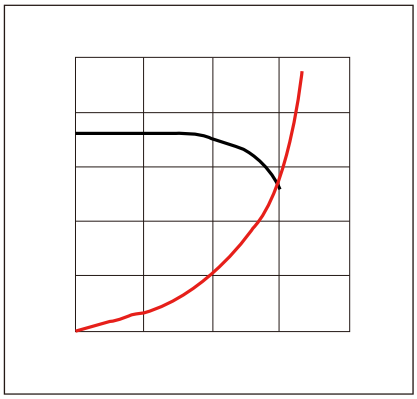
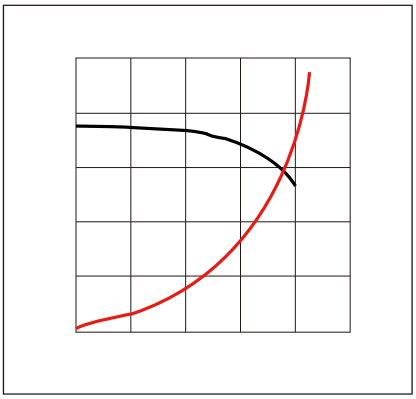
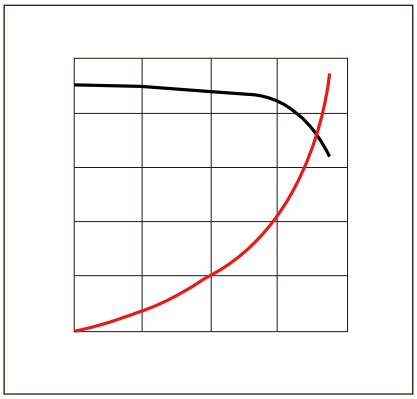
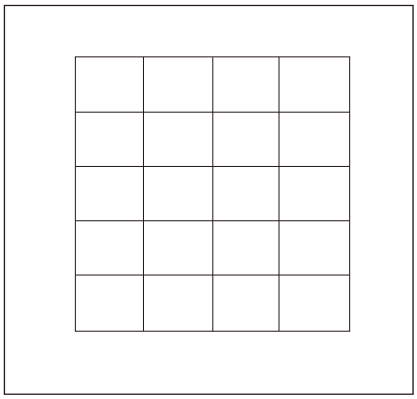

		Satura on			
	(μH)	(A)	(A)	(mΩ)	(mΩ)

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

Test Frequency : Inductance : 100KHz /0.1V.
Opera ng Temperature : -40 ℃ ℃
Temperature Rise Current: the actual value of DC current when the temperature rise is ΔT50 ℃
Satura on Current that will cause ini al inductance to drop approximately 30%



KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com