


MDTE Series

Wire Wound Molded SMD Power Inductors

Size 25201B






FEATURES

- {2D äI-údzWl-ə2y
- I λEK ÖdzWlNlSyúsf2θ 5/wzKλEK ŠYöλSyöè
- ±ŠNlè f2θ I-Ö2dzäəÖ y2λäŠ I-yŘ ØŠNlè f2θ tŠI-ŷI-ÈS bdzÈ y2λäŠ
- I λEK NlŠtλI-öλtλúè
- Mλtλ: [ŠI-Řó tōúπCλlŠŠ I-yŘ w2 I { Ö2YλJtλI-yú
- hλJŠNlI-əyƏ úŠYλJŠNlI-údzNlŠ ππλÇbMnp C óLyÖtdzŘλyƏ äŠff π úŠYλJŠNlI-údzNlŠ NλäŠú
- v dzI-yəüèY олллλJÖă


APPLICATION

- b2úŠ t / λJ2θŠNl äəăúŠYλyÖtλ La ±tπc
- 5/κ5 / Ö2yÖŠNlúŠNl

Dimensions: [mm]

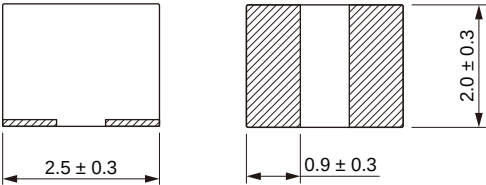


Land Pattern: [mm]



Part No	Inductance @ 1MHz/1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	Temperature Rise Current Max.	DC Resistance Max.

Saturation Current will cause L to drop approximately 30%
 Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40°C

Typical Electrical Characteristics:

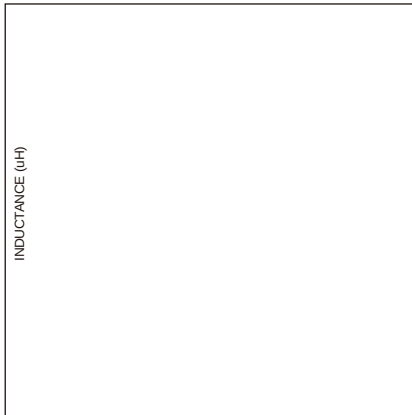



Soldering Reflow:


Packaging Information:

Tape Dimension:

Series	A0 (mm)	B0 (mm)
--------	------------	------------


MDTE25201B

Peel force of top cover tape:

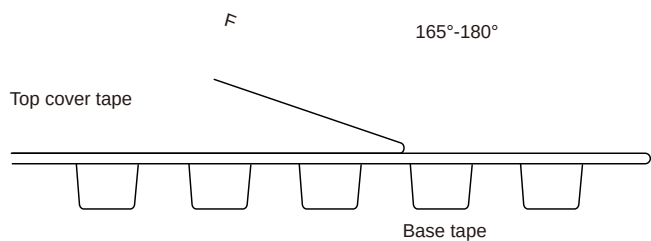

The peel force of top cover tape shall be betw os

Reel Dimension: [mm]

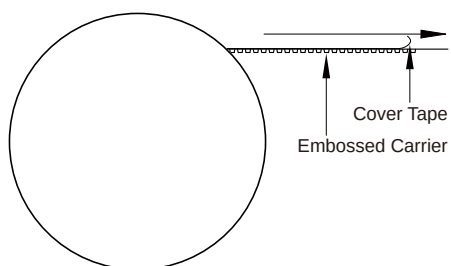

Packaging Quantity: