**NRSE Series**
SMD Shielded Tiny Power Inductor
Size 4018


**CHARACTERISTICS**

- 
- 


**APPLICATION**

- 
- 

Dimensions: [mm]

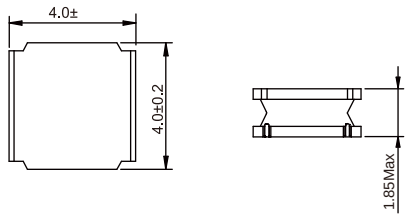


Land Pattern: [mm]




Electrical Properties:

| Part No | Inductance @100KHz/0.25V (μH) | Tolerance | Satura on Current (A) | Temperature Rise Current (A) | DCR ±30% (mΩ) |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com