

THC Series




CHARACTERISTICS

- Assemblage design, sturdy structure.
-
- Flat wire winding, achieve a low DC resistance.
-
- temperature and frequency range.
-
-

APPLICATION

- High current DC/DC converter
-

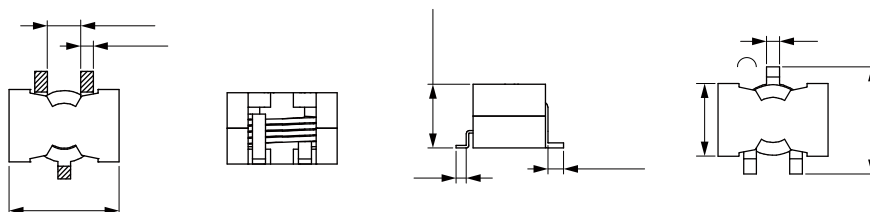

THC2017-4R7M	4.70	±20%	21.0	42.0	3.30	4.00
THC2017-6R8M	6.80	±20%	20.0	30.0	3.57	4.30
THC2017-8R2M	8.20	±20%	20.0	25.0	3.57	4.30
THC2017-100M	10.0	±20%	16.0	24.0	5.28	6.30
THC2017-220M	22.0	±20%	16.0	10.0	5.28	6.30
THC2017-330M	33.0	±20%	12.0	9.00	13.0	15.0
THC2017-470M	47.0	±20%	12.0	6.50	13.0	15.0

